


Features

- Wide 2 : 1 Input Voltage Range(9~18V,18~36V,36~75V)
- High Efficiency up to 92%
- Remote On/Off
- Input / Output Isolation Voltage: 1.5kVDC
- Extended Operating Temperature Range: -40°C to +85°C
- Output Short Circuit Protection:
Hiccup, continuous & Auto Recovery
- Over Voltage Protection: Clamp Mode
- Over Temperature Protection
- Shielded Metal Case with Insulated Baseplate
- Lead Free Design, RoHS Compliant
- Industry Standard Pinout
- Adjustable Output Voltage
- Customer Design Available
- Safety Standard / Approval : IEC / EN60950-1



Description

The BVA25 Series are isolated 25W DC/DC converters. Designed with highly efficiency, allow the operating temperature range of these units to be -40°C to +85°C in a 50.8x40.6x10.2mm shielded metal case. Further features include wide 2 : 1 input voltage range, remote on/off control, short-circuit protection , over voltage protection and over temperature protection.

Applications

These converters are well suitable for battery operated equipment, measurement equipment, telecom, wireless network, Industry control system, everywhere where isolated, tightly regulated voltages and compact size are required.

Technical Specification


All specifications are typical at nominal input, full load and 25°C unless otherwise stated.

Model Number	Input Voltage Range	Output Voltage (V)	Output Current (mA)		Input Current (mA)		Eff. (2) (%)	Capacitive Load, max. (3) (uF)
			Min. Load (1)	Full. Load	No Load	Full Load		
BVA25-12S0	9~18V Nominal:12V	3.3	16	5500	49	1939	82	39000
BVA25-12S1		5	0	5000	58	2604	84	22000
BVA25-12S2		12	10	2500	23	2976	88	5600
BVA25-12S3		15	15	2000	24	2976	88	3900
BVA25-12D2		±12	±2	±1250	36	2976	88	2800
BVA25-12D3		±15	±25	±1000	39	2941	89	1200
BVA25-24S0	18~36V Nominal:24V	3.3	0	5500	52	945	84	39000
BVA25-24S1		5	0	5000	61	1255	87	22000
BVA25-24S2		12	14	2500	15	1437	91	5600
BVA25-24S3		15	5	2000	64	1437	91	3900
BVA25-24D2		±12	0	±1250	72	1437	91	2800
BVA25-24D3		±15	0	±1000	68	1437	91	1200
BVA25-48S0	36~75V Nominal:48V	3.3	0	5500	15	473	84	39000
BVA25-48S1		5	0	5000	23	628	87	22000
BVA25-48S2		12	0	2500	18	718	91	5600
BVA25-48S3		15	0	2000	19	718	91	3900
BVA25-48D2		±12	0	±1250	20	718	91	2800
BVA25-48D3		±15	0	±1000	16	710	92	1200


Input Specifications		
Input voltage	12V nominal input	9-18V
	24V nominal input	18-36V
	48V nominal input	36-75V
Input filter		Pi type
Input surge voltage (100ms max.)	12V input	25V
	24V input	50V
	48V input	100V
Input reflected ripple current	Nominal Vin and full load	68mA _{p-p} typ.
Start up time	Nominal Vin and constant resistive load	80ms typ.
Remote ON/OFF	Converter: ON	Open or $3.5V < V_r < 12V$
	Converter: OFF	Short ⁽⁴⁾ or $0V < V_r < 0.7V$
Sourcing current of remote control pin	Nominal Vin	< 0.2 mA
Idle input current (at Remote OFF state)	Nominal Vin	< 12 mA
Environmental Specifications		
Operating ambient temperature		-40°C to +85°C (with derating)
Maximum case temperature		+100°C
Storage temperature range		-55°C to +105°C
Relative humidity		95% RH max.
Temperature coefficient		±0.02% / °C max.
Output Specifications		
Output power		30 Watts max.
Voltage accuracy	Full load and nominal Vin	±1%
Minimum load		See table
Line regulation	LL to HL at full load	±1%
Load Regulation	25% load to full load	Single ±1%
	Balanced load	Dual ±1%
	Unbalanced load 25% to 100% full load	±3%
Ripple and Noise	20MHz bandwidth	85mV _{p-p} max.
Over voltage protection (Zener Diode Clamp)	3.3V _{out} models	3.9V
	5V _{out} models	6.2V
	12V _{out} models	15V
	15V _{out} models	18V
Capacitive load		See table
Over load protection	% of full load at nominal input	150% typ.
Thermal shutdown		115°C typ.
Short circuit protection		Hiccup, continuous(Auto Recovery)
Transient response settling time	50% load step change	360μs typ. (2.6ms for 3.3V _{out})
Transient response over shoot	di/dt=0.8A/μs	≤ ±5% of V _o

General Specifications		
Efficiency	Nominal input	See table
Isolation voltage	Input to output	1500VDC
Isolation resistance	500VDC	10 ⁹ Ohms min.
Isolation capacitance		1200pF typ.
Switching frequency (Fixed)	Pulse width modulation (PWM)	300kHz typ.
Reliability, calculated MTBF		1.28 × 10 ⁶ Hrs
Physical Specifications		
Case material		Nickel-coated copper
Base material		Non-conductive black plastic
Potting material		Silicon rubber (UL94 V-0)
Dimensions		2.00 × 1.60 × 0.40 Inch (50.8 × 40.6 × 10.2 mm)
Weight		48g (1.69oz) typ.


BVA25 Series
Power Derating Curve⁽⁵⁾

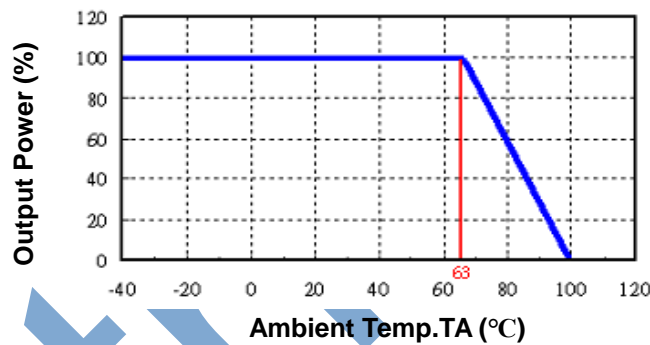

BVA25-48S1
Input voltage vs. Efficiency

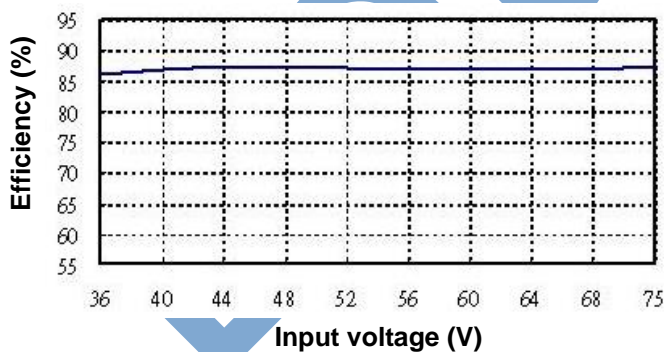

BVA25-48S1
Output Current vs. Efficiency


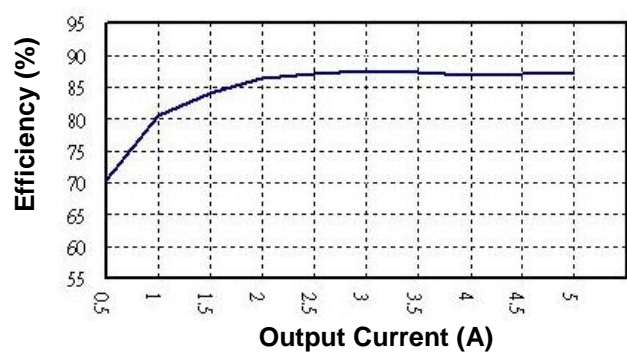


BVA25-48S1

BVA25-48S1

Transient Response at 50%~100% Max Load


Loop Gain & Phase at Vi=48V, Full Load

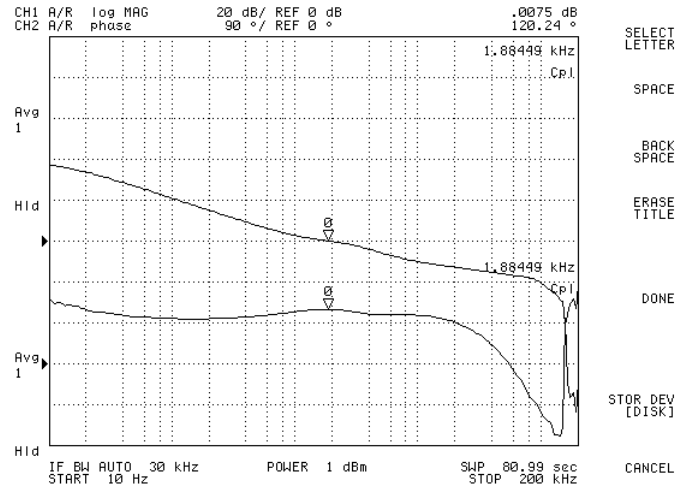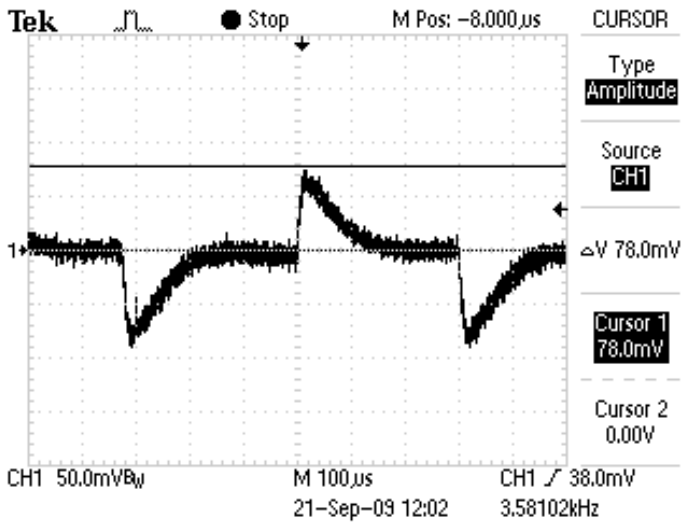

Note

1. Io below this value will not damage these converters, however, they may not meet all listed specifications.
2. Typical value, tested at nominal input and full load.
3. For each output.
4. Short to -Vin (Pin 2).
5. Based on BVA25-48S1.
6. Specifications subject to change without notice.


Mechanical Dimensions

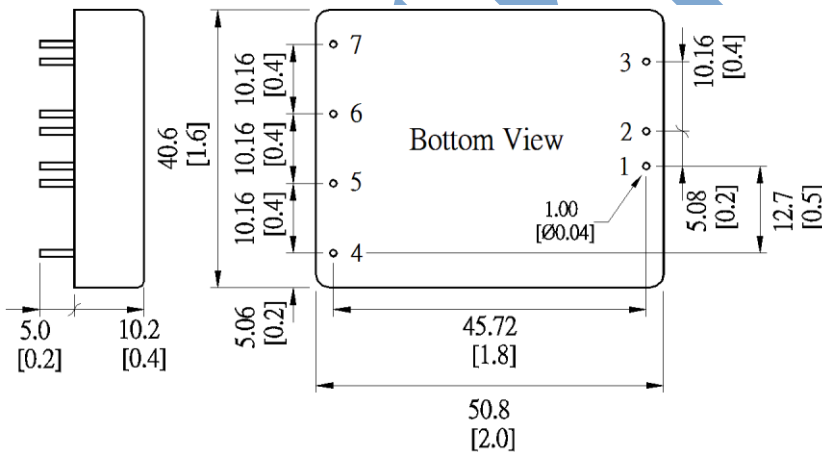

Unit: mm [inch]
 Tolerance: ±0.5 [0.02]

Pin Assignment		
Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	Remote On/Off	Remote On/Off
4	No pin	+Vout
5	+Vout	Common
6	-Vout	-Vout
7	Trim	Trim

Package Information

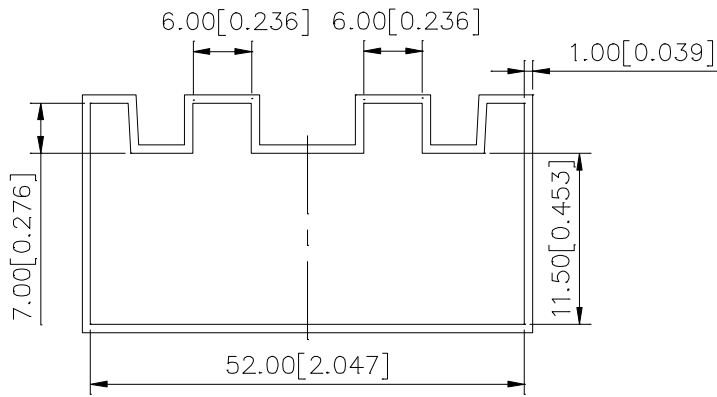

PS:


Unit: mm [inch]

L= 280 mm[11.02 inch] ; ONE TUBE = 6 PCS

L= 360 mm[14.17 inch] ; ONE TUBE = 8 PCS

Test Configurations

All specifications are typical at nominal input, full load and 25°C unless otherwise stated.

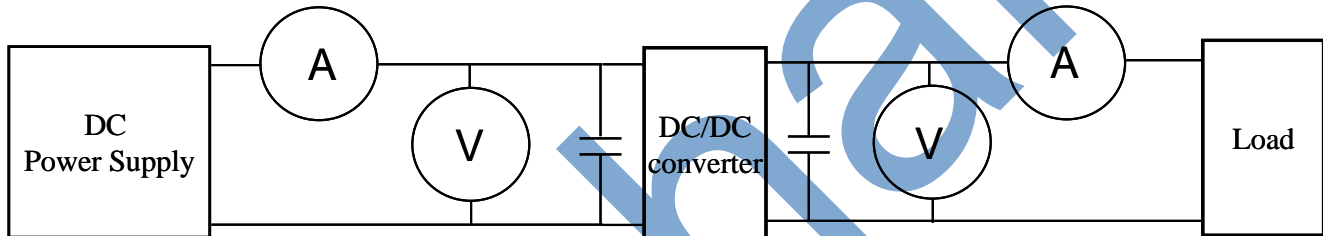

◎DC Power Supply: It offers a wide voltage and current range precisely.

◎Current meter (A): Accuracy → 200μA ~ 200mA 4 ranges $\pm(0.2\% \text{ rdg} + 2 \text{ digits})$
2000mA ~ 20A 2 ranges $\pm(0.3\% \text{ rdg} + 2 \text{ digits})$.

◎Voltage meter (V): Accuracy → $\pm(0.03\% \text{ rdg} + 4 \text{ digits})$.

◎Load: At full load.

◎Wires: The resistance of the wires must be small.

1. Input voltage range: Narrow input voltage range ($\pm 10\%$) · wide input voltage range (2:1 and 4:1) ·

EX: Narrow input voltage range ($\pm 10\%$)

5V nominal input	→	4.5~5.5V
12V nominal input	→	10.8~13.2V
24V nominal input	→	21.6~26.4V

Wide input voltage range 2:1

5V nominal input	→	4.5~9V
12V nominal input	→	9~18V
24V nominal input	→	18~36V
48V nominal input	→	36~75V

Wide input voltage range 4:1 (W)

24V nominal input	→	9~36V
48V nominal input	→	18~75V

2. Input power :

$$P_{in} = V_{in} \times I_{in}$$

V_{in} : Input voltage

I_{in} : Input current

3. Output power :

$$P_{out} = V_{out} \times I_{out}$$

V_{out} : Output voltage

I_{out} : Output current

4. Efficiency :

$$\text{Efficiency} = \frac{P_{out}}{P_{in}} \times 100\%$$

P_{out} : Output power

P_{in} : Input power

5. Voltage accuracy:

$$\frac{|V_{out} - V_{out(nominal)}|}{V_{out}} \times 100\%$$

V_{out} : Output voltage

$V_{out(nominal)}$: Nominal output voltage

6. Line regulation: Wide input voltage range and regulated output voltage series.

$$\frac{|V_{out(LL)} - V_{out(HL)}|}{V_{out(LL)}} \times 100\%$$

LL: Low Line input voltage

HL: High Line input voltage


7. Load regulation :

$$\frac{|V_{out(FL)} - V_{out(NL)}|}{V_{out(FL)}} \times 100\%$$


$V_{out(FL)}$: Output voltage at full load

$V_{out(NL)}$: Output voltage at 25% full load or 10% full load

8. Ripple and Noise: as shown below. The bandwidth is 0-20MHz.

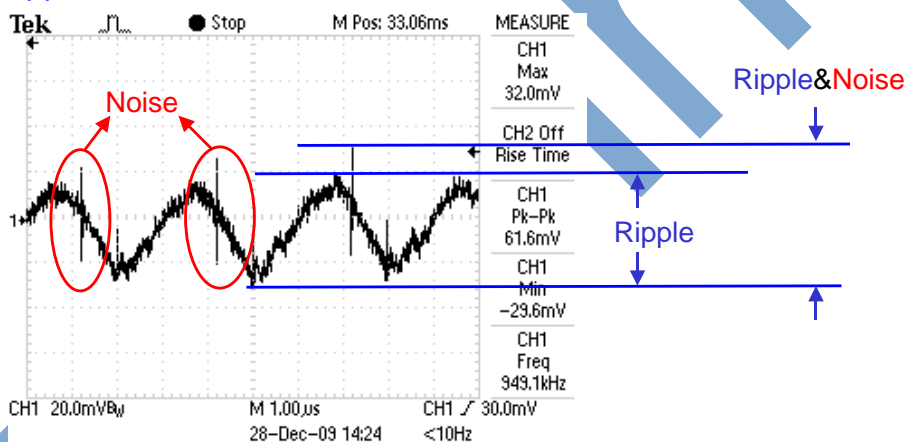


Output Ripple&Noise measurement test circuit: as shown below.

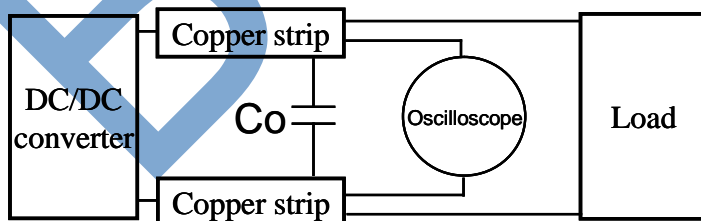

C_o : usually 0.47µF.

9. Temperature derating curve: The DC-DC converter will operate over a wider temperature range if less power is drawn from the output and the device is already running. The temperature derating curve shows the operating power-temperature range. As shown below.

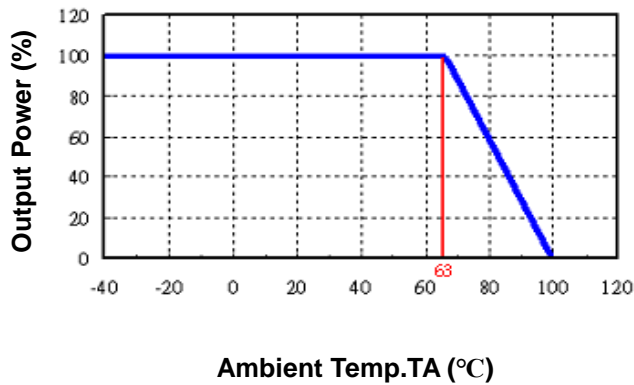

10. Switching frequency: The nominal operating frequency of the DC-DC converters.

11. Input to output isolation: The dielectric breakdown strength test between input and output circuits. This is the isolation voltage the device is capable of withstanding for a specified time, usually 1 second or 1 minute.